

LIQUID & SLURRY SEPARATOR SYSTEMS



**Model 2200
Slurry Separator**

AB Simple and reliable

AB Minimal maintenance

AB Totally corrosion resistant

AB Low power consumption

AB High throughputs-up to 100m³/hr


AB Fully automated operation

AB Solutions for all types of slurry applications including flood washing and vegetable waste products

Affordable and effective solutions to long term problems in waste management.

TYPICAL SEPARATOR INSTALLATION

2200 SLURRY SEPARATOR

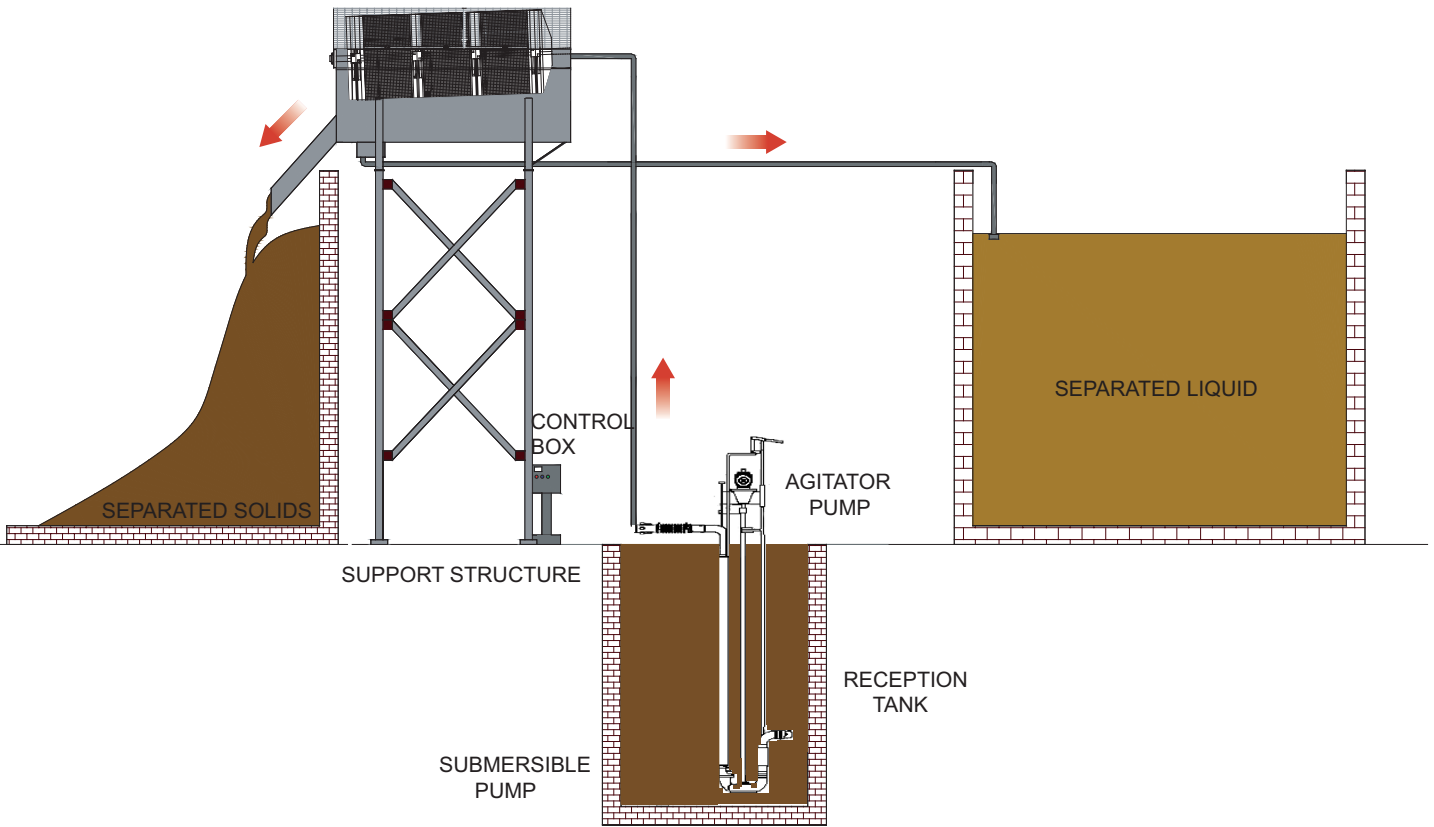

TECHNICAL SPECIFICATIONS

SLURRY SEPARATORS

Constructed completely from 304 stainless steel the machine is equipped with drum covered in tensioned stainless steel wire mesh with direct drive via geared reducer. The electrical control panel with mimic display for the complete system (pump and agitator) is included in the price.

Model	Capacity	kW	Drum Dia	L	W	H
1800	60m ³ /hr	0.75	700mm	2000mm	1000mm	700mm
2200	100m ³ /hr	1.50	900mm	2500mm	1250mm	900mm

DEWATERING SCREWS

De-watering presses reduce the moisture content of the separated solids by a further 10%.

Model	To suit	kW
DP20	1800	1.50



We also offer full design, installation and commissioning services.

Capacities mentioned in this price list are approximate, based on extensive user experience.

In accordance with our policy of continuous development, we reserve the right to change specifications and prices at any time without notice or incurring liability to purchasers. All goods supplied according to our published terms and conditions of sale (copies on application)

AB ALVAN BLANCH
Processing the World's Crops

Chelworth Malmesbury Wiltshire SN16 9SG England
TELEPHONE: 01666 577333

FACSIMILE: Sales/Admin 01666 577339 Production 01666 577263
EMAIL: info@alvanblanch.co.uk WEB: www.alvanblanch.co.uk