




ALVAN BLANCH

Processing the World's Crops

TUBULAR SCREW CONVEYORS



Flanged inlet on 160mm conveyor,
note heavy duty flight

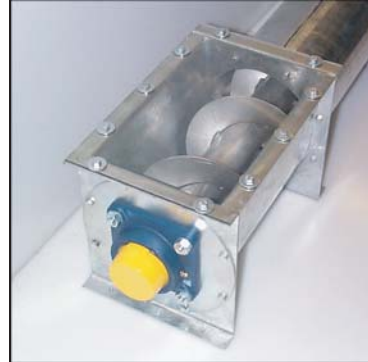

Outlet & drive section on
160mm conveyor



Inlet section with exposed flight
and control sleeve.



Drive section of 315mm conveyor.

- Sizes from 160mm to 250mm diameter for use at any angle up to 75 degrees.
- Suitable for all cereals, peas, pulses and granular products.
- Durable galvanised steel finish (powder coated as an option) - good corrosion resistance
- Reliable v belt drive. Direct drive on low capacity models and geared motor and chain drive on large capacity models.
- Self lube bearings - low maintenance.
- Lengths made to customers exact requirements - ease of plant design.
- Heavy duty flights mounted on large diameter inner tube.
- Heavy duty continuous seam welded outer tube.
- Intermediate bearings on all lengths over 3M.
- 3 ph electric motor as standard.
- All joints have folded flanges for easy installation.
- Flanged inlet and outlet as standard.
- Special inlet hoppers and outlet adaptors made to order.



ALVAN BLANCH

Processing the World's Crops

Chelworth Malmesbury Wiltshire SN16 9SG England
TELEPHONE: 01666 577333

FACSIMILE: Sales/Admin 01666 577339 Production 01666 577263

EMAIL: info@alvanblanch.co.uk WEB: www.alvanblanch.co.uk