


Counterflow Cooler

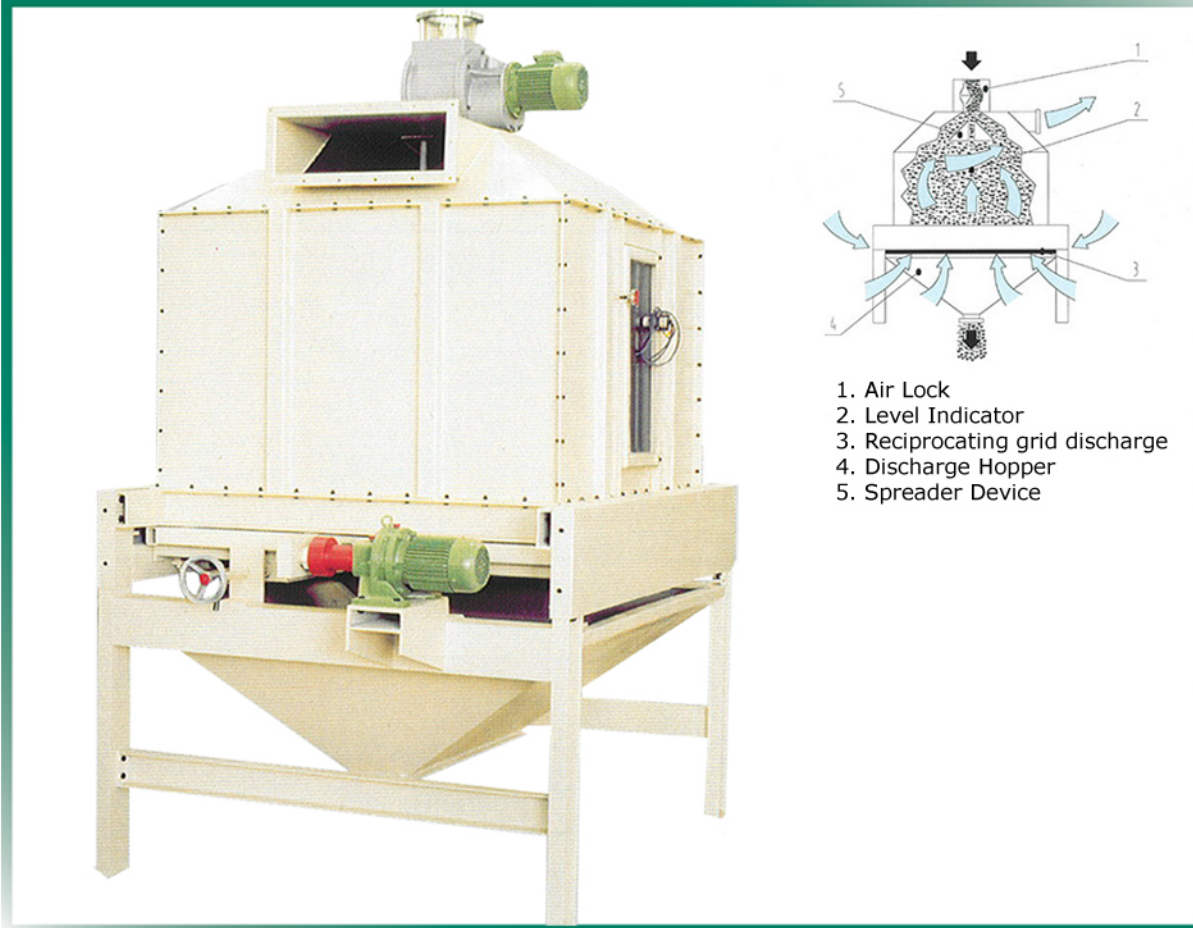

- AB** Counterflow cooling, product goes downwards, cooling air drawn upwards
- AB** Efficient, reliable and robust
- AB** Capacities 1-20 tonnes per hour
- AB** Fan, cyclone or filter exhaust systems available
- AB** Used for cooling pelleted, extruded and granular materials

In accordance with our policy of continuous development, we reserve the right to change specifications and prices at any time without notice or incurring liability to purchasers. All goods supplied according to our published terms and conditions of sale (copies on application)